

The logo for SECO/WARWICK, featuring the company name in a bold, italicized, sans-serif font. The word 'SECO' is in black, and 'WARWICK' is in black with a red diagonal slash between the two words. The logo is enclosed in a black oval border.

SECO/WARWICK

A large industrial facility with a high ceiling and a series of long, parallel aluminium annealing furnaces. In the foreground, two large rolls of aluminium coil are supported by wooden stands. The background shows a complex network of pipes, ladders, and structural elements. The text 'Aluminium Annealing Furnaces' is overlaid in a white, bold, sans-serif font on a semi-transparent blue background.

Aluminium Annealing Furnaces

SECO/WARWICK provides custom engineered aluminium coil and foil annealing furnaces with capacities ranging from single coil modular furnaces to multi-zone furnaces with tight zone control. We have the experience, knowledge and talent to manufacture efficient furnaces with exceptional temperature uniformity and unique charging techniques to fit the most demanding application. SECO/WARWICK continues to develop technologies to improve equipment performance and efficiency. Two significant improvements for coil/foil processing include:

- Vortex® Flow Jet Heating System that reduces cycle time by taking advantage of the high heat transfer produced through convection heating. The perfect solution for coil annealing.
- Mass Flow design, especially dedicated for foil annealing, to protect load surfaces that are vulnerable to damage during high atmosphere flow.



SECO/WARWICK coil annealing multi zone furnaces




Single zone annealing furnaces

Furnace Efficiency

Further efficiencies are realized with SECO/WARWICK thermal head, air-to-work ratio control system, which uses separate load and air thermocouples in each control zone.

Because the load temperature is constantly monitored, a thermal head is maintained without risk of overheating the load. When the load approaches metal set point, the air temperature is reduced in direct proportion to the rate of rise in load temperature.

Therefore, the maximum amount of thermal head is maintained for the maximum amount of time, resulting in the shortest possible heating time. To further enhance the control system, an adjustable ratio system is also available and is most applicable when varying coil sizes are being annealed.

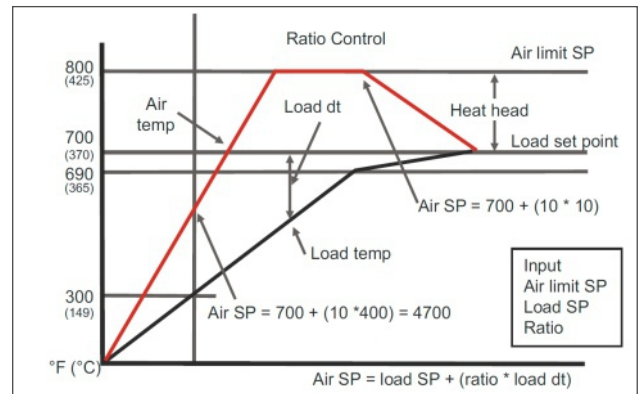

Air-to-work ratio control Consult SECO/WARWICK for the adjustable ratio system

To maximize efficiency, as well as protect coils from dusting or ceramic fiber contamination, SECO/WARWICK developed and uses a proprietary mesh and mortar insulation system which not only increases insulation efficiency by 15-20%, but also simplifies maintenance. Our insulation system starts with several millimeters of board-type insulation cover by a ceramic fiber blanket. A stainless steel wire mesh covers the entire insulating surface and is coated with a high-temperature mortar, which provides a rigid surface. If insulation damage occurs, it is much easier to repair than stainless steel liner sheets. To further enhance furnace efficiency, SECO/WARWICK designs radiant tubes to achieve maximum tube life.

Temperature Uniformity

SECO/WARWICK annealing furnaces exploit several different designs to ensure temperature uniformity. SECO/WARWICK holds patents for innovations on controlling airflow recirculation over various size loads, increasing heat transfer and uniformity. Our furnaces incorporate both vertical airflow with specifically designed vertical baffles on each side of the load, or the high-velocity directed mass flow system. In either case, the vertical baffles improve air stream uniformity and separate the load from direct heat radiation. Radiant tubes for either gas-fired burners both recuperative and autorecuperative or electric heating elements provide indirect heating, protect the load from direct heat radiation, and maximize temperature uniformity.

Aluminium Annealing Furnaces

With large coils, the temperature uniformity is governed by load configuration. In very large coil applications and where tight temperature tolerance is required, SECO/WARWICK designates two temperature-control zones for each recirculation fan. This field-proven design compensates for differing coil characteristics, combustion performance and loading practices.



Bypass cooler reduces fin maintenance and keeps performance at peak levels

Vortex® Jet Heating System

Aluminium annealing requires an advanced convective heating system to obtain the shortest possible cycle without any loss of quality in the material. Quality problems typically appear at the strip edges, and are represented by non-uniform material properties like hardness, and discolorations of the strip surface, as in the case of 5xxx and 7xxx alloys caused by Mg- or Mn-bleeding, cracking of residual milling oil from coil degreasing, or coil surface melting. These problems are caused by overheating at the coil edge resulting from non uniform impingement of the air flow.


The governing parameter describing the temperature uniformity of a convective heating system is the ratio of maximum to minimum heat transfer coefficient (HTC). This parameter limits the heat up time since the smaller the HTC ratio the higher the average temperature that can be obtained without exceeding the maximum tolerable local heat transfer.

The Vortex® Flow Jet Heating System incorporates arrays of 4 round inclined nozzle jets that generate a spiral vortex motion of air that results in high heat transfer without producing hot spots in the coil. The high volume flow of this nozzle system in conjunction with a unique semi-axial fan design allows the coil to be heated more uniformly by a larger mass of atmosphere. The effective thermal conductivity in a strip coil is much lower in the radial direction than in the axial direction, therefore, the most effective way of heating the coil is through the edges of the coil wraps. The difference between the thermal conductivity for the two directions is caused by the heat insulating effect of the gas and milling oil layers in the coil between the strip layers.


Advantages

Analysis of the infrared picture, equally scaled, indicates that a more uniform surface temperature can be achieved by using the new Vortex® Flow Jet Heating System. The coil surface temperature uniformity profiles present an overview of temperature uniformity for the entire heat up cycle. These profiles demonstrate that a better surface uniformity is achieved using the vortex nozzle system. The HTC ratio calculation based on the above data is 1,25 for the Vortex® Nozzle system. For aluminium alloys of lower thermal conductivity, this parameter is expected to be even higher.


- Reduced heat-up time without local overheating
- Improved uniformity of material properties
- Minimizes local cracking and staining of milling oil
- Reduced electrical consumption because the fan operates at a lower speed rather than a higher volume flow




High Convection Vortex Flow system installed in the furnace

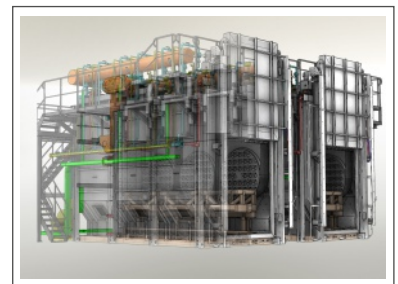

Coil Annealing Furnace

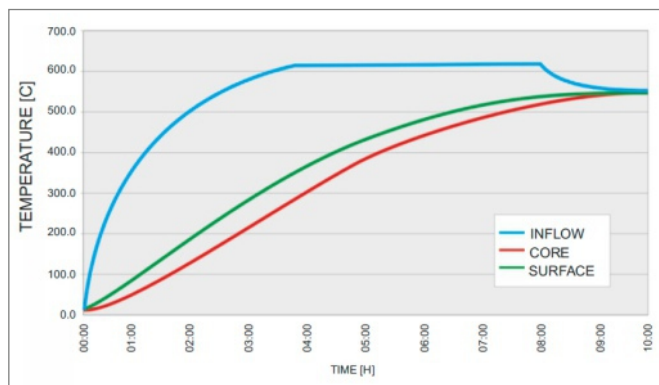


Temperature uniformity profiles

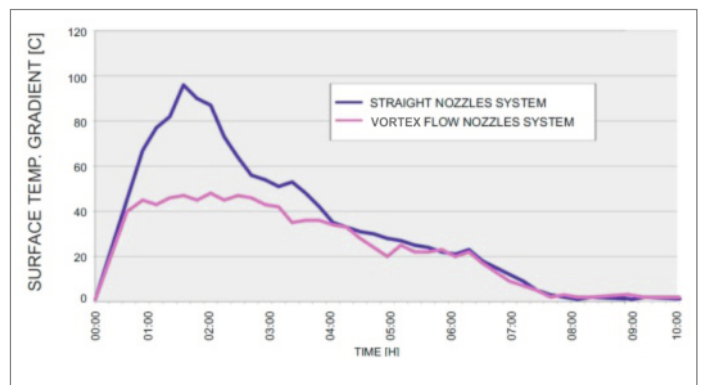

Aluminium Annealing Furnaces

Bypass Coolers

SECO/WARWICK provides a proprietary bypass cooler design for annealing furnaces. Cooling under a protective atmosphere for either metallurgical or handling considerations is very important in this application. The coolers use an internal bypass arrangement which limits the temperature of the atmosphere going through the heat exchangers to 175°C. This prevents baking of the volatilized rolling oil on the fins of the heat exchanger. The coolers are designed to provide plunge, programmed, or auxiliary cooling and are available in standard or custom sizes. The coolers can be rear or side mounted according to space availability. Additionally, multiple coolers can also add a bypass cooler to an existing annealing furnace. SECO/WARWICK currently has over 100 of these coolers in operation in coil and foil annealing applications.

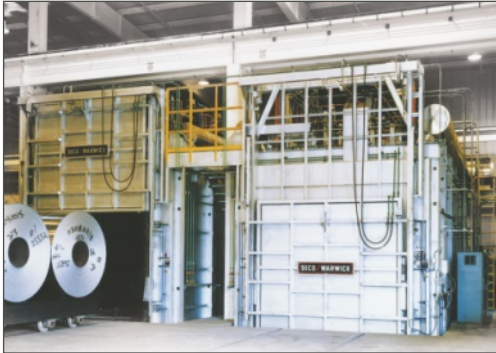

SECO/WARWICK Group

POLAND
SECO/WARWICK S.A.
Sobieskiego 8
66-200 Świebodzin, Poland
tel. +48 68 3820 500
fax +48 68 3820 555
info@secowarwick.com.pl
www.secowarwick.com

POLAND
SECO/WARWICK Europe Sp. z o.o.
Świerczewskiego 76
66-200 Świebodzin, Poland
tel. +48 68 3819 800
fax +48 68 3819 805
europe@secowarwick.com.pl
www.secowarwick.com

USA
SECO/WARWICK Corp.
P.O. Box 908
Meadville, PA 16335-6908, USA
tel. +1 814 332 8400
fax +1 814 724 1407
info@secowarwick.com
www.secowarwick.com

USA
RETECH SYSTEMS LLC
100 Henry Station Rd.
Ukiah, CA 95482, USA
tel. +1 707 462 6522
fax +1 707 462 4103
leroy.b.leland@retechsystemsllc.com
www.retechsystemsllc.com

GERMANY
SECO/WARWICK Service GmbH
An der Molkerei 15
D-47551 Bedburg-Hau, Germany
tel. +49 (2821) 713 100
fax +49 (2821) 713 10-29
service@secowarwick.com
www.secowarwick.com

CHINA
SECO/WARWICK RETECH
Thermal Equipment Manufacturing
(Tianjin) Co., Ltd.
7B Second Xeda Road
Tianjin, China 300385
tel. +86 22 238 28 300
fax +86 22 238 28 305
d.rabenda@secowarwick.com.pl
www.swretech.com.cn

INDIA
SECO/WARWICK Allied Pvt. Ltd.
5th Floor, Amfotech It Park
Road No. 8, Wagle Estate
Thane (W) - 400 604, India
tel. +91 22 6730 1400
fax +91 22 6730 1488
allied@alliedfurnaces.com
www.alliedfurnaces.com

BRAZIL
SECO/WARWICK do Brasil Industria
de Fornos Ltda.
Parque Industrial II
Jundiá, SP - Brasil
CEP: 13213-170
tel. +55 (11) 3109-5900
fax +55 11 4525-1047
engefor@engefor.com.br
www.secowarwick.com

RUSSIA
SECO/WARWICK Rus
Pyzhevskiy pereulok, bld 5/1,
office № 400
119017 Moscow, Russia
tel. +7 499 788 9721
moscow@secowarwick.com.pl
www.secowarwick.com

BELARUS
SECO/WARWICK OOO Minsk Office
8 Mielnikajte str., office 26
220004 Mińsk, Belarus
tel./fax: + 375 17306 23 71
secom@infonet.by
www.secowarwick.com